Environmental Product





Declaration

In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

Intumescent paints for fire protection of wood and steel

from

Protega, AB



Programme: The International EPD® System, <u>www.environdec.com</u>

Programme operator: EPD International AB

EPD registration number: S-P-05708
Publication date: 2022-03-22
Revision date (v1.1): 2023-07-07
Revision date (v1.2): 2025-03-10
Valid until: 2027-03-21

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com







Company information

Owner of the EPD: Protega, AB

Contact:

E-mail: <u>info@protega.se</u> Phone: +46 (0)410 56780

<u>Description of the organisation:</u> Since 1988, our goal has been to manufacture and market absolutely world-class fire protection products from our site in Trelleborg. Step by step, the company developed from selling a few products and is today offering a complete range of products in passive fire protection for load-bearing steel and wood structures and fireproof surfaces, as well as sealing system. We have grown slowly but surely, without compromising on our own high-quality standards. Our driving force is to preserve great values, which makes our environmental work crucial for us. A lot of research and work is behind our product's high environmental assessments.

It is together with our customers that we build a safe and sustainable world. Together with them we preserve what is of value – both human and economic.

<u>Product-related or management system-related certifications:</u> The company has implemented quality management in accordance with the standard requirements of EN ISO 9001: 2015 and environmental management standards in accordance with the requirements of EN ISO 14001: 2015.

Name and location of production site(s): Verkstadsgatan 6B, SE-231 66, Trelleborg, Sweden





Product information

Product name: Intumescent paints for fire protection of wood and steel

<u>Product identification:</u> Intumescent paint has CE marking or local type approval and represents that products comply with the EU's New Approach or local Directives. Our products are manufactured in compliance with European Assessment Document (EAD) which specifies all requirements for factory made intumescent paint:

- a) European Assessment Document (EAD) EAD 350402-00-1106 "Reactive coatings for fire protection of steel elements"
- b) ETAG 028 edition June 2012 used as EAD
- c) EN 13501

Company is ISO certified with certification for both ISO 9001:2015 (Quality Standard) and ISO 14001:2015 (Environmental Standard).

Product description: This EPD takes into account these types of Intumescent paints:

- Protega Steel 1001
- Protega Steel 1002
- Protega Wood-S
- Protega Novatherm 2FR
- Protega Novatherm 4FR
- Protega Novatherm 4FRe
- Protega Ecomastic 5FR
- Protega Topcoat W
- Protega Upgrade
- Protega Timber W

Products are both white and transparent, water-borne. These products are described as intumescent paints and they are optimized for different fire scenarios in both loadbearing structures and surface reaction to fire protection. Intumescent paints are optimized for 30 to 120 minutes fire protection. As surface protection the product reaches Euroclass Bs1, d0 on a wooden based surface.

In the event of a fire, the paint is transformed into a thick, porous foam layer that delays the flow of heat to the treated structure. The product can be applied using brushes, rollers or sprays. Details concerning surface pre-treatment, application requirements and drying behaviour can be seen in the current technical information sheet (see www.protega.se).

Technical data:

Name	Value	Unit
Density	1300-1400	kg/m3
Solids content	66 - 72	%
pH value	7.7 – 8.7	log10(aH+)
Fire resistance /EN13381-8/,/EN13501-2/	R15-120	min
Reaction to fire /EN13501-1/	Euroclass Bs1, d0	
Durability /EAD 350454-00-1104/, /EAD 350141-00-1106/	Type Z ₂	





Content information:

Name	Value	Unit
Polymer dispersion -50%	15-60	% [m/m]
Pigment TiO2	2-15	% [m/m]
Ammonium polyphosphate	15-30	% [m/m]
Melamine	0-10	% [m/m]
Cyanoguanidin	15-25	% [m/m]
Polyol	5-30	% [m/m]
Filler	1-50	% [m/m]
Dispersing agents	<1	% [m/m]
Thixotropic agents	<1	% [m/m]
Defoamers	<1	% [m/m]
Coalescent	< 3	% [m/m]
Water	1.5-20	% [m/m]

Protega Wood-S, Protega Novatherm 2FR, Protega Ecomastic 5FR, Protega Topcoat W, Protega Upgrade and Protega Timber W do not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm). While Protega Steel 1001, Protega Steel 1002, Protega Novatherm 4FR and Protega Novatherm 4FRe contain Melamine (REACH SVHC substance) in amount greater than 0,1 % (1000 ppm).

Dangerous substances from the candidate list of SVHC for Authorisation	EC No.	CAS No.	Weight-% per declared unit
Melamine	203-615-4	108-78-1	0-10

UN CPC code: 3511 Paints and Varnishes and related products





LCA information

<u>Functional unit / declared unit:</u> In accordance with the PCR the declared unit is 1 kilogram of the wet product.

Name	Dry content	Coefficient to calculate 1 kg of dry product
Protega Steel 1001	68%	0.68
Protega Steel 1002	67%	0.67
Protega Wood-S	70%	0.70
Protega Novatherm 2FR	70%	0.70
Protega Novatherm 4FR, Protega Novatherm 4FRe	64%	0.64
Protega Ecomastic 5FR	74%	0.74
Protega Topcoat W	53%	0.53
Protega Upgrade	70%	0.70
Protega Timber W	70%	0.70

Reference service life: For the above mentioned products, when used for the intended purpose, the service life is at least 10 years, in accordance with /EAD 350402-00-1106/. The respective "Technical Approval Body" has recommended a service life of 25 years for dry interior applications – category Z2 in accordance with /EAD 350402-00-1106/. However, the practical service life can be far longer. A precondition for a long service life is that the requirements of correct handling and regular inspection of the coated surfaces are satisfied.

The information concerning service life cannot be interpreted as a guarantee given by the manufacturer, but serves as an aid towards the selection of the right product, taking account of the expected and economically reasonable service life of the building.

When the products are used according to the standard codes of practice, adverse influences through ageing are not known.

<u>Time representativeness:</u> Primary data was collected internally. The production data refers to the average of the year 2020.

<u>Database(s)</u> and <u>LCA software used:</u> The Ecoinvent database provides the life cycle inventory data for the raw and process materials obtained from the background system. The used database is Ecoinvent 3.6. The LCA software used is One Click LCA.

<u>Description of system boundaries:</u> Cradle to gate with options. The LCA was carried out considering the Product stage phases (A1, A2, A3), Distribution (A4), End of life (C1, C2, C3, C4), Potential environmental benefits (D) in accordance with EN 15804.


<u>Data quality:</u> The foreground data collected internally is based on yearly production amounts and extrapolations of measurements on specific machines and plants. Overall, the data quality can be described as good. The primary data collection has been done thoroughly.

<u>Cut-off criteria:</u> 100% of total material and energy input flows have been included in the life cycle analysis.





System diagram:

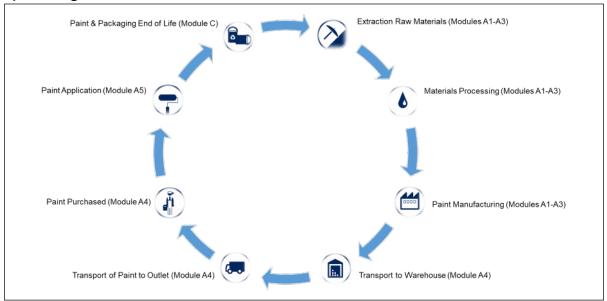

System boundary:

	Pro	oduct s	tage	ti pro	struc- on cess age		Use stage End of life stage								Resource recovery stage		
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling- potential
Module	A1	A2	А3	A4	A 5	B1	B2	В3	В4	В5	В6	В7	C1	C2	С3	C4	D
Modules declared	х	х	х	х	х	MNR	MNR	MNR	MNR	MNR	MNR	MNR	х	х	х	Х	х
Geography	EU	EU	EU	EU	EU	-	-	-	-	-	-	-	EU	EU	EU	EU	EU
Specific data used		>90%		-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation - products		<10%	١	-	1	-	-	-	-	1	-	-	1	-	-	1	-
Variation - sites		0%		-	-	-	-	-	-	-	-	-	-	-	-	-	-

Description of the system boundary (X = Included in LCA; MND = Module Not declared; MNR = Module Not relevant)

Product stage:

- A1: This stage considers the extraction and processing of raw materials.
- A2: The raw materials are transported to the manufacturing plant. In this case, the model includes road transportation of each raw material.
- A3: This stage includes the manufacture of products and packaging. It has considered all the energy consumption and waste generated in the production plant.





Production process description

The product is approximately 1/3 water; the remaining 2/3 comprises of binder, filler and additives that aid performance. Protega paints are manufactured using dispersing units. All raw materials are checked and the quantity for a batch is weighed. Then all raw materials are mixed with water in the dispersing unit. After and during the batch preparation is an internal quality control carried out. The control includes technical quality characteristics relating to paint and fire protection requirements. The internal control is supervised by external monitoring together with third party testing of some products. All these tests are made with well documented intervals.

Construction process stage:

A4: This stage includes transport from the production gate to the construction site where the product shall be installed.

Transportation is calculated based on data form manufacturer and a scenario with the parameters described in the following table.

Parameter	Value/Description
Vehicle type used for transport	EURO 5 truck with a trailer with an average load of 16-32t
Distance	100 % of production:
	Truck – 573 km;
Capacity utilization	56 % of the capacity in volume

A5: During the installation phase, the treatment of waste deriving from packaging.

Use stage:

In normal use scenario, it is assumed that no maintenance (B2), repair (B3), replacement (B4) and refurbishment (B5) is needed during the 10 years of life of the product.

Damages or repairs should be treated in the same way as new application with the paints. These changes are not taking into account.

End of Life stage:

This stage includes the transportation and management of waste produced after the study reference time has elapsed. The end-of-life stage is composed by modules C1 Deconstruction, C2 Transport, C3 Waste treatment and C4 Waste disposal. Landfill has been assumed as end of life scenario. The impact of building demolition has been considered negligible compared to other impacts of a building's life cycle.

Collection process specified by type	Dry mass of the paints, kg (mixed with the rest of building waste)
Recovery system specified by type	No reuse. recycling or energy recovery
Disposal specified by type	Dry mass of the paints, kg to landfill
Assumptions for the development of	EURO 5 truck with a trailer with an average load of 16-32t
the scenario (e.g. transportation)	50 km of average distance to the landfill





Environmental Information

Note: Environmental impacts according to EN 15804+A1, CML/ISO 21930 are presented below

Results for Protega Steel 1001, Protega Steel 1002, Novatherm 4FR

Core environmental impact indicators according to 15804:2012+A2:2019

		-	Re	sults pe	r function	onal or	declared	unit				
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A 4	A 5	C1	C2	C3	C4	D
GWP-total	kg CO ₂ eq.	2.0E+0	2.49E-2	1.06E-1	2.13E+0	5.38E-2	1.07E-01	0	5.51E-3	0	7.88E-2	0
GWP-fossil	kg CO ₂ eq.	1.99E+0	2.49E-2	1.39E-1	2.16E+0	5.43E-2	7.35E-02	0	5.5E-3	0	7.88E-2	0
GWP- biogenic	kg CO ₂ eq.	0	0	-3.33E-2	-3.33E-2	3.94E-5	3.33E-02	0	2.93E-6	0	0.0E+0	0
GWP- luluc	kg CO ₂ eq.	7.90E-4	7.49E-6	1.01E-4	8.99E-4	1.63E-5	6.39E-07	0	1.95E-6	0	3.43E-6	0
ODP	kg CFC ₋₁₁ eq.	2.67E-7	5.85E-9	1.26E-8	2.86E-7	1.28E-8	1.36E-10	0	1.25E-9	0	2.16E-9	0
AP	mol H ⁺ eq.	2.97E-2	1.05E-4	4.97E-4	3.03E-2	2.28E-4	1.19E-05	0	2.25E-5	0	5.96E-5	0
EP- freshwater *	kg P eq	6.26E-4	6.21E-7	1.60E-5	6.42E-4	4.42E-7	6.98E-08	0	4.6E-8	0	1.26E-7	0
EP- marine	kg N eq.	1.81E-3	3.15E-5	1.12E-4	1.96E-3	6.87E-5	5.09E-06	0	6.68E-6	0	2.01E-5	0
EP- terrestrial	mol N eq.	2.56E-2	3.48E-4	1.04E-3	2.70E-2	7.59E-4	5.53E-05	0	7.38E-5	0	2.22E-4	0
POCP	kg NMVOC eq.	6.58E-3	1.12E-4	3.74E-4	7.07E-3	2.44E-4	1.37E-05	0	2.26E-5	0	8.08E-5	0
ADP- minerals& metals**	kg Sb eq.	2.94E-5	4.25E-7	1.09E-6	3.09E-5	9.27E-7	1.83E-08	0	1.49E-7	0	7.5E-8	0
ADP- fossil**	МЈ	3.38E+1	3.87E-1	4.19E+0	3.84E+1	8.45E-1	1.36E-02	0	8.29E-2	0	1.64E-1	0
WDP	m³	1.84E+0	1.44E-3	6.42E-2	1.90E+0	3.14E-3	8.95E-05	0	2.67E-4	0	7.33E-3	0

Acronyms

GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption * Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e.

^{**}EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.





Use of resources

	Results per functional or declared unit Tot.A1 A2 A3 Tot.A1 A4 A5 C4 C2 C3 C4													
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A 4	A5	C1	C2	С3	C4	D		
PERE	МЈ	1.35E+0	4.87E-3	6.27E-1	1.99E+0	1.06E-2	2.05E-4	0	1.17E-3	0	2.85E-3	0		
PERM	МЈ	0	0	2.86E-1	2.86E-1	0	-2.86E-1	0	0	0	0	0		
PERT	МЈ	1.35E+0	4.87E-3	9.13E-1	2.27E+0	1.06E-2	-2.85E-1	0	1.17E-3	0	2.85E-3	0		
PENRE	МЈ	2.49E+1	3.87E-1	2.82E+0	2.81E+1	8.45E-1	1.36E-2	0	8.29E-2	0	1.64E-1	0		
PENRM	МЈ	9.02E-1	0	1.36E+0	2.27E+0	0	-1.36E+0	0	0	0	-9.02E-1	0		
PENRT	МЈ	2.58E+1	3.87E-1	4.19E+0	3.03E+1	8.45E-1	-1.35E+0	0	8.29E-2	0	-7.38E-1	0		
SM	kg	1.85E-2	0	3.38E-4	1.88E-2	0	0	0	0	0	0	0		
RSF	МЈ	0	0	0	0	0	0	0	0	0	0	0		
NRSF	МЈ	0	0	0	0	0	0	0	0	0	0	0		
FW	m³	1.56E-2	8.06E-5	1.74E-3	1.75E-2	1.76E-4	1.93E-5	0	1.42E-5	0	1.85E-4	0		

Acronyms

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water





Waste production and output flows

Waste production

	Results per functional or declared unit													
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A4	A5	C1	C2	C3	C4	D		
Hazardous waste disposed	kg	1.38E-1	3.77E-4	5.65E-3	1.44E-1	8.21E-4	5.19E-4	0	8.42E-5	0	2.93E-4	0		
Non- hazardous waste disposed	kg	2.2E0	4.17E-2	1.91E-1	2.44E0	9.08E-2	2.91E-2	0	5.78E-3	0	6.6E-1	0		
Radioactive waste disposed	kg	5.35E-5	2.67E-6	1.74E-5	7.35E-5	5.8E-6	5.05E-8	0	5.69E-7	0	9.88E-7	0		

Output flows

			Re	sults pe	r functio	nal or c	declared	l unit				
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A 4	A5	C1	C2	C3	C4	D
Components for re-use	kg	0	0	3.5E-2	3.5E-2	0	0	0	0	0	0	0
Material for recycling	kg	0	0	1E-3	1E-3	0	0	0	0	0	0	0
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	0	0
Exported energy, electricity	МЈ	0	0	0	0	0	0	0	0	0	0	0
Exported energy, thermal	МЈ	0	0	0	0	0	0	0	0	0	0	0





ENVIRONMENTAL IMPACTS - EN 15804+A1, CML / ISO 21930

			Re	sults pe	r function	onal or	declare	d unit				
Indicator	Unit	A1	A2	А3	Tot.A1- A3	A4	A 5	C1	C2	C3	C4	D
GWP	kg CO₂ eq.	1.94E0	2.47E-2	1.33E-1	2.1E0	5.38E-2	7.35E-2	0	5.45E-3	0	5.59E-2	0
ODP	kg CFC ₋₁₁ eq.	2.84E-7	4.66E-9	1.39E-8	3.02E-7	1.01E-8	1.17E- 10	0	9.94E- 10	0	1.72E-9	0
AP	kg SO₂ eq.	2.84E-2	5.08E-5	4.17E-4	2.88E-2	1.11E-4	8.19E-6	0	1.1E-5	0	2.62E-5	0
EP	kg PO ₄ ³ eq.	7.51E-3	1.03E-5	1.67E-4	7.69E-3	2.23E-5	6.28E-6	0	2.27E-6	0	2.64E-3	0
POCP	kg C₂H₄e	1.2E-3	3.22E-6	2.36E-5	1.23E-3	7E-6	1.93E-7	0	7.26E-7	0	1.17E-5	0
ADP- minerals & metals	kg Sb eq.	2.94E-5	4.26E-7	1.09E-6	3.09E-5	9.27E-7	1.83E-8	0	1.49E-7	0	7.5E-8	0
ADP-fossil	МЈ	3.38E1	3.88E-1	4.19E0	3.84E1	8.45E-1	1.36E-2	0	8.29E-2	0	1.64E-1	0
Acronyms	GWP = Global Warming Potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential; EP = Eutrophication potential; POCP = Formation of ozone of lower atmosphere; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption											

ENVIRONMENTAL IMPACTS – GWP-GHG - THE INTERNATIONAL EPD SYSTEM

			Re	sults pe	r functio	onal or o	declared	unit				
Indicator	Unit	A1	A2	А3	Tot.A1- A3	A 4	A5	C1	C2	С3	C4	D
GWP-GHG	kg CO2e	2.0E+0	2.49E-2	1.39E-1	2.16E+0	5.43E-2	7.35E-2	0	5.5E-3	0	7.88E-2	0





Environmental Information

Note: Environmental impacts according to EN 15804+A1, CML/ISO 21930 are presented below

Results for Protega Novatherm 2FR, Protega Wood S, Protega Upgrade and Protega Timber W

Core environmental impact indicators according to 15804:2012+A2:2019

		•	Re	sults pe	r function	onal or	declared	unit				
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A4	A 5	C1	C2	C3	C4	D
GWP-total	kg CO₂ eq.	2.2E+0	4.29E-2	1.06E-1	2.35E+0	5.38E-2	1.07E-01	0	3.18E-3	0	8.36E-2	0
GWP-fossil	kg CO₂ eq.	2.2E+0	4.29E-2	1.39E-1	2.38E+0	5.43E-2	7.35E-02	0	3.18E-3	0	8.36E-2	0
GWP- biogenic	kg CO ₂ eq.	0	0	-3.33E-2	-3.33E-2	0	3.33E-02	0	2.31E-6	0	0	0
GWP- luluc	kg CO₂ eq.	4.47E-4	1.29E-5	1.01E-4	5.61E-4	1.63E-5	6.39E-07	0	9.57E-7	0	3.63E- 06	0
ODP	kg CFC- 11 eq.	1.80E-7	1.01E-8	1.26E-8	2.02E-7	1.28E-8	1.36E-10	0	7.48E- 10	0	2.29E-9	0
AP	mol H ⁺ eq.	2.14E-2	1.80E-4	4.97E-4	2.20E-2	2.28E-4	1.19E-5	0	1.34E-5	0	6.32E-5	0
EP- freshwater*	kg P eq	5.96E-4	1.07E-6	1.60E-5	6.13E-4	4.42E-7	2.28E-8	0	2.59E-8	0	1.34E-7	0
EP- marine	kg N eq.	1.67E-3	5.43E-5	1.12E-4	1.83E-3	6.87E-5	5.09E-6	0	4.03E-6	0	2.14E-5	0
EP- terrestrial	mol N eq.	1.72E-2	6.00E-4	1.04E-3	1.88E-2	7.59E-4	5.53E-5	0	4.45E-5	0	2.35E-4	0
POCP	kg NMVOC eq.	7.22E-3	1.93E-4	3.74E-4	7.79E-3	2.44E-4	1.37E-5	0	1.43E-5	0	8.57E-5	0
ADP- minerals&m etals**	kg Sb eq.	1.76E-5	7.32E-7	1.09E-6	1.94E-5	9.27E-7	1.83E-8	0	5.43E-8	0	7.96E-8	0
ADP-fossil**	МЈ	4.28E+1	6.68E-1	4.19E+0	4.76E+1	8.45E-1	1.36E-2	0	4.95E-2	0	1.74E-1	0
WDP	m³	4.71E-1	2.48E-3	6.42E-2	5.38E-1	3.14E-3	8.95E-5	0	1.84E-4	0	7.77E-3	0

Acronyms

GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

^{*} Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e.

^{**}EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.





Use of resources

			Re	sults pe	r functio	onal or	declared	unit				
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A4	A 5	C1	C2	С3	C4	D
PERE	МЈ	7.33E-1	8.40E-3	6.27E-1	1.37E+0	1.06E-2	2.05E-4	0	6.23E-4	0	3.02E-3	0
PERM	МЈ	0	0	2.86E-1	2.86E-1	0	-2.86E-1	0	0	0	0	0
PERT	МЈ	7.33E-1	8.40E-3	9.13E-1	1.65E+0	1.06E-2	-2.85E-1	0	6.23E-4	0	3.02E-3	0
PENRE	МЈ	1.40E+1	6.68E-1	2.82E+0	1.75E+1	8.45E-1	1.36E-2	0	4.95E-2	0	1.74E-1	0
PENRM	МЈ	7.48E-1	0	1.36E+0	2.11E+0	0	1.36E+0	0	0	0	-7.48E-1	0
PENRT	МЈ	1.48E+1	6.68E-1	4.19E+0	1.96E+1	8.45E-1	1.35E+0	0	4.95E-2	0	-5.74E-1	0
SM	kg	7.84E-3	0	3.38E-4	8.18E-3	0	0	0	0	0	0	0
RSF	МЈ	0	0	0	0	0	0	0	0	0	0	0
NRSF	МЈ	0	0	0	0	0	0	0	0	0	0	0
FW	m³	7.55E-3	1.39E-4	1.74E-3	9.42E-3	1.76E-4	1.93E-5	0	1.03E-5	0	1.96E-4	0

Acronyms

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water





Waste production and output flows

Waste production

			Re	sults pe	r functio	onal or	declare	d unit				
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A4	A5	C1	C2	C3	C4	D
Hazardous waste disposed	kg	6.82E-2	6.49E-4	5.65E-3	7.45E-2	8.21E-4	5.19E-4	0	4.81E-5	0	3.1E-4	0
Non- hazardous waste disposed	kg	1.15E+0	7.18E-2	1.91E-1	1.41E+0	9.08E-2	2.91E-2	0	5.32E-3	0	7E-1	0
Radioactive waste disposed	kg	2.10E-5	4.58E-6	1.74E-5	4.30E-5	5.8E-6	5.05E-8	0	3.4E-7	0	1.05E-6	0

Output flows

			Re	sults pe	r functio	nal or c	declared	d unit				
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A 4	A5	C1	C2	СЗ	C4	D
Components for re-use	kg	0	0	3.5E-2	3.5E-2	0	0	0	0	0	0	0
Material for recycling	kg	0	0	1E-3	1E-3	0	0	0	0	0	0	0
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	0	0
Exported energy, electricity	МЈ	0	0	0	0	0	0	0	0	0	0	0
Exported energy, thermal	МЈ	0	0	0	0	0	0	0	0	0	0	0





ENVIRONMENTAL IMPACTS - EN 15804+A1, CML / ISO 21930

			Re	sults pe	er function	onal or	declare	d unit				
Indicator	Unit	A1	A2	А3	Tot.A1- A3	A 4	A 5	C1	C2	С3	C4	D
GWP	kg CO₂ eq.	2.17E+0	4.25E-2	1.33E-1	2.35E+0	5.38E-2	7.35E-2	0	3.15E-3	0	5.93E-2	0
ODP	kg CFC ₋₁₁ eq.	2.09E-7	8.02E-9	1.39E-8	2.31E-7	1.01E-8	1.17E- 10	0	5.94E- 10	0	1.83E-9	0
AP	kg SO₂ eq.	1.99E-2	8.73E-5	4.17E-4	2.04E-2	1.11E-4	8.19E-6	0	6.47E-6	0	2.78E-5	0
EP	kg PO ₄ ³ eq.	7.81E-3	1.76E-5	1.67E-4	7.99E-3	2.23E-5	6.28E-6	0	1.31E-6	0	2.8E-3	0
POCP	kg C₂H₄e	1.66E-3	5.53E-6	2.36E-5	1.69E-3	7E-6	1.93E-7	0	4.1E-7	0	1.24E-5	0
ADP- minerals & metals	kg Sb eq.	1.76E-5	7.32E-7	1.09E-6	1.94E-5	9.27E-7	1.83E-8	0	5.43E-8	0	7.96E-8	0
ADP-fossil	МЈ	4.28E+1	6.68E-1	4.19E+0	4.76E+1	8.45E-1	1.36E-2	0	4.95E-2	0	1.74E-1	0
Acronyms	GWP = Globa Eutrophication resources; A water consu	on potential DP-fossil = /	; POCP = Fo	rmation of c	zone of low	er atmosph	ere; ADP-mi	nerals&met	als = Abiotic	c depletion	potential for	

ENVIRONMENTAL IMPACTS – GWP-GHG - THE INTERNATIONAL EPD SYSTEM

			Re	sults pe	r functio	onal or o	declared	unit				
Indicator	Unit	A1	A2	А3	Tot.A1- A3	A4	A5	C1	C2	С3	C4	D
GWP-GHG	kg CO2e	2.2E+0	4.29E-2	1.39E-1	2.39E+0	5.43E-2	7.35E-2	0	3.18E-3	0	8.36E-2	0





Environmental Information

Note: Environmental impacts according to EN 15804+A1, CML/ISO 21930 are presented below

Results for Protega Ecomastic 5FR

Core environmental impact indicators according to 15804:2012+A2:2019

		•				onal or	declared	unit				
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A 4	A 5	C1	C2	C3	C4	D
GWP-total	kg CO ₂ eq.	1.07E+0	9.42E-3	1.06E-1	1.19E+0	5.38E-2	1.07E-1	0	3.37E-3	0	8.84E-2	0
GWP-fossil	kg CO ₂ eq.	1.07E+0	9.41E-3	1.39E-1	1.22E+0	5.43E-2	7.35E-2	0	3.36E-3	0	8.83E-2	0
GWP- biogenic	kg CO ₂ eq.	0	0	-3.33E-2	-3.33E-2	3.94E-5	3.33E-2	0	2.44E-6	0	0	0
GWP- luluc	kg CO ₂ eq.	3.43E-4	2.83E-6	1.01E-4	4.47E-4	1.63E-5	6.39E-7	0	1.01E-6	0	3.84E-6	0
ODP	kg CFC ₋₁₁ eq.	7.02E-8	2.23E-9	1.26E-8	8.5E-8	1.28E-8	1.36E-10	0	7.91E- 10	0	2.42E-9	0
AP	mol H ⁺ eq.	8.14E-3	3.98E-5	4.97E-4	8.68E-3	2.28E-4	1.19E-5	0	1.41E-5	0	6.68E-5	0
EP- freshwater *	kg P eq	1.13E-4	7.71E-8	5.21E-6	1.18E-4	4.42E-7	2.28E-8	0	2.74E-8	0	1.41E-7	0
EP- marine	kg N eq.	7.19E-4	1.2E-5	1.12E-4	8.44E-4	6.87E-5	5.09E-6	0	4.26E-6	0	2.26E-5	0
EP- terrestrial	mol N eq.	7.49E-3	1.33E-4	1.04E-3	8.66E-3	7.59E-4	5.53E-5	0	4.7E-5	0	2.49E-4	0
POCP	kg NMVOC eq.	2.77E-3	4.26E-5	3.74E-4	3.19E-3	2.44E-4	1.37E-5	0	1.51E-5	0	9.06E-5	0
ADP- minerals& metals**	kg Sb eq.	1.11E-5	1.62E-7	1.09E-6	1.23E-5	9.27E-7	1.83E-8	0	5.74E-8	0	8.41E-8	0
ADP- fossil**	МЈ	2.16E1	1.47E-1	4.19E0	2.59E1	8.45E-1	1.36E-2	0	5.23E-2	0	1.84E-1	0
WDP	kg CO ₂ eq.	4.64E-1	5.49E-4	6.42E-2	5.29E-1	3.14E-3	8.95E-5	0	1.95E-4	0	8.22E-3	0

Acronyms

GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption * Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e.

^{**}EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.





Use of resources

			Re	sults pe	r functio	onal or	declared	l unit				
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A4	A 5	C1	C2	С3	C4	D
PERE	МЈ	6.81E-1	1.84E-3	6.27E-1	1.31E+0	1.06E-2	6.81E-1	0	6.58E-4	0	6.81E-1	0
PERM	МЈ	0	0	2.86E-1	2.86E-1	0	0	0	0	0	0	0
PERT	МЈ	6.81E-1	1.84E-3	9.13E-1	1.60E+0	1.06E-2	6.81E-1	0	6.58E-4	0	6.81E-1	0
PENRE	МЈ	1.98E+1	1.46E-1	2.82E+0	2.28E+1	8.45E-1	1.98E+1	0	5.23E-2	0	1.98E+1	0
PENRM	МЈ	0	0	1.36E+0	1.36E+0	0	0	0	0	0	0	0
PENRT	МЈ	1.98E+1	1.46E-1	4.19E+0	2.42E+1	8.45E-1	1.98E+1	0	5.23E-2	0	1.98E+1	0
SM	kg	8.87E-3	0	3.38E-4	9.2E-3	0	0	0	0	0	0	0
RSF	МЈ	0	0	0	0	0	0	0	0	0	0	0
NRSF	МЈ	0	0	0	0	0	0	0	0	0	0	0
FW	m³	8.74E-3	3.07E-5	1.74E-3	1.05E-2	1.76E-4	1.93E-5	0	1.09E-5	0	2.07E-4	0

Acronyms

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water





Waste production and output flows

Waste production

			Re	sults pe	r functio	onal or	declare	d unit				
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A4	A5	C1	C2	C3	C4	D
Hazardous waste disposed	kg	2.77E-1	1.43E-4	5.65E-3	2.83E-1	8.21E-4	5.19E-4	0	5.08E-5	0	3.28E-4	0
Non- hazardous waste disposed	kg	1E0	1.59E-2	1.91E-1	1.21E0	9.08E-2	2.91E-2	0	5.62E-3	0	7.4E-1	0
Radioactive waste disposed	kg	2.23E-5	1.01E-6	1.74E-5	4.07E-5	5.8E-6	5.05E-8	0	3.59E-7	0	1.11E-6	0

Output flows

			Re	sults pe	r functio	nal or c	declared	l unit				
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A 4	A5	C1	C2	СЗ	C4	D
Components for re-use	kg	0	0	3.5E-2	3.5E-2	0	0	0	0	0	0	0
Material for recycling	kg	0	0	1E-3	1E-3	0	0	0	0	0	0	0
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	0	0
Exported energy, electricity	МЈ	0	0	0	0	0	0	0	0	0	0	0
Exported energy, thermal	МЈ	0	0	0	0	0	0	0	0	0	0	0





ENVIRONMENTAL IMPACTS - EN 15804+A1, CML / ISO 21930

			Re	sults pe	r function	onal or	declared	d unit				
Indicator	Unit	A1	A2	А3	Tot.A1- A3	A4	A 5	C1	C2	С3	C4	D
GWP	kg CO₂ eq.	1.03E0	9.4E-3	1.33E-1	1.17E0	5.38E-2	7.35E-2	0	3.33E-3	0	6.27E-2	0
ODP	kg CFC ₋₁₁ eq.	6.75E-8	1.77E-9	1.39E-8	8.32E-8	1.01E-8	1.17E- 10	0	6.28E- 10	0	1.93E-9	0
AP	kg SO₂ eq.	8.43E-3	1.93E-5	4.17E-4	8.87E-3	1.11E-4	8.19E-6	0	6.84E-6	0	2.94E-5	0
EP	kg PO ₄ ³ eq.	1.17E-3	3.9E-6	1.67E-4	1.34E-3	2.23E-5	6.28E-6	0	1.38E-6	0	2.96E-3	0
POCP	kg C₂H₄e	3.21E-4	1.22E-6	2.36E-5	3.46E-4	7E-6	1.93E-7	0	4.34E-7	0	1.31E-5	0
ADP- minerals & metals	kg Sb eq.	1.11E-5	1.62E-7	1.09E-6	1.23E-5	9.27E-7	1.83E-8	0	5.74E-8	0	8.41E-8	0
ADP-fossil	МЈ	2.16E1	1.47E-1	4.19E0	2.59E1	8.45E-1	1.36E-2	0	5.23E-2	0	1.84E-1	0
Acronyms	GWP = Globa Eutrophication resources; A water consul	on potential DP-fossil = /	POCP = Fo	rmation of o	zone of low	er atmosph	ere; ADP-mi	nerals&met	als = Abiotic	depletion	ootential for	

ENVIRONMENTAL IMPACTS – GWP-GHG - THE INTERNATIONAL EPD SYSTEM

Results per functional or declared unit												
Indicator	Unit	A1	A2	А3	Tot.A1- A3	A 4	A5	C1	C2	С3	C4	D
GWP-GHG	kg CO2e	1.07E+0	9.42E-3	1.39E-1	1.22E+0	5.43E-2	7.35E-2	0	3.36E-3	0	8.83E-2	0





Environmental Information

Note: Environmental impacts according to EN 15804+A1, CML/ISO 21930 are presented below

Results for Protega Topcoat W

Core environmental impact indicators according to 15804:2012+A2:2019

oore enviro							declared	unit				
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A 4	A 5	C1	C2	C 3	C4	D
GWP-total	kg CO ₂ eq.	1.48E+0	1.01E-2	1.06E-1	1.60E+0	5.38E-2	1.07E-01	0	2.41E-3	0	6.33E-2	0
GWP-fossil	kg CO ₂ eq.	1.48E+0	1.01E-2	1.39E-1	1.63E+0	5.43E-2	7.35E-02	0	2.41E-3	0	6.33E-2	0
GWP- biogenic	kg CO ₂ eq.	0	0	-3.33E-2	-3.33E-2	3.94E-5	3.33E-02	0	1.75E-6	0	0	0
GWP- luluc	kg CO ₂ eq.	6.7E-4	3.05E-6	1.01E-4	7.74E-4	1.63E-5	6.39E-07	0	7.25E-7	0	2.75E-6	0
ODP	kg CFC ₋₁₁ eq.	1.21E-7	2.4E-9	1.26E-8	1.36E-7	1.28E-8	1.36E-10	0	5.66E- 10	0	1.74E-9	0
AP	mol H ⁺ eq.	2.33E-2	4.29E-5	4.97E-4	2.39E-2	2.28E-4	1.19E-5	0	1.01E-5	0	4.79E-5	0
EP- freshwater *	kg P eq	1.39E-4	8.3E-8	5.21E-6	1.44E-4	4.42E-7	2.28E-8	0	1.96E-8	0	1.01E-7	0
EP- marine	kg N eq.	1.35E-3	1.29E-5	1.12E-4	1.47E-3	6.87E-5	5.09E-6	0	3.05E-6	0	1.62E-5	0
EP- terrestrial	mol N eq.	1.3E-2	1.43E-4	1.04E-3	1.42E-2	7.59E-4	5.53E-5	0	3.37E-5	0	1.78E-4	0
POCP	kg NMVOC eq.	5.05E-3	4.59E-5	3.74E-4	5.47E-3	2.44E-4	1.37E-5	0	1.08E-5	0	6.49E-5	0
ADP- minerals& metals**	kg Sb eq.	1.94E-5	1.74E-7	1.09E-6	2.07E-5	9.27E-7	1.83E-8	0	4.11E-8	0	6.02E-8	0
ADP- fossil**	МЈ	2.53E1	1.59E-1	4.19E0	2.96E1	8.45E-1	1.36E-2	0	3.75E-2	0	1.32E-1	0
WDP	m³	1.25E0	5.9E-4	6.42E-2	1.32E0	3.14E-3	8.95E-5	0	1.39E-4	0	5.89E-3	0

Acronyms

GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption * Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e.

**EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.





Use of resources

	Results per functional or declared unit											
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A4	A 5	C1	C2	С3	C4	D
PERE	МЈ	1.56E+0	1.98E-3	6.27E-1	2.19E+0	1.06E-2	2.05E-4	0	4.72E-4	0	2.29E-3	0
PERM	МЈ	0	0	2.86E-1	2.86E-1	0	-2.86E-1	0	0	0	0	0
PERT	МЈ	1.56E+0	1.98E-3	9.13E-1	2.48E+0	1.06E-2	-2.85E-1	0	4.72E-4	0	2.29E-3	0
PENRE	МЈ	2.38E+1	1.58E-1	2.82E+0	2.67E+1	8.45E-1	1.36E-2	0	3.75E-2	0	1.32E-1	0
PENRM	МЈ	5.03E-1	0	1.36E+0	1.87E+0	0	1.36E+0	0	0	0	-5.03E-1	0
PENRT	МЈ	2.43E+1	1.58E-1	4.19E+0	2.86E+1	8.45E-1	1.35E+0	0	3.75E-2	0	-3.71E-1	0
SM	kg	2.84E-2	0	3.38E-4	2.88E-2	0	0	0	0	0	0	0
RSF	МЈ	0	0	0	0	0	0	0	0	0	0	0
NRSF	МЈ	0	0	0	0	0	0	0	0	0	0	0
FW	m³	2.32E-2	3.3E-5	1.74E-3	2.5E-2	1.76E-4	1.93E-5	0	7.8E-6	0	1.49E-4	0

Acronyms

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water





Waste production and output flows

Waste production

	Results per functional or declared unit											
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A4	A5	C1	C2	C3	C4	D
Hazardous waste disposed	kg	2.83E-1	1.54E-4	5.65E-3	2.89E-1	8.21E-4	5.19E-4	0	3.64E-5	0	2.35E-4	0
Non- hazardous waste disposed	kg	2.41E0	1.71E-2	1.91E-1	2.62E0	9.08E-2	2.91E-2	0	4.03E-3	0	5.3E-1	0
Radioactive waste disposed	kg	4.28E-5	1.09E-6	1.74E-5	6.12E-5	5.8E-6	5.05E-8	0	2.57E-7	0	7.94E-7	0

Output flows

	Results per functional or declared unit												
Indicator	Unit	A1	A2	А3	Tot.A1 -A3	A4	A5	C1	C2	СЗ	C4	D	
Components for re-use	kg	0	0	3.5E-2	3.5E-2	0	0	0	0	0	0	0	
Material for recycling	kg	0	0	1E-3	1E-3	0	0	0	0	0	0	0	
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	0	0	
Exported energy, electricity	МЈ	0	0	0	0	0	0	0	0	0	0	0	
Exported energy, thermal	МЈ	0	0	0	0	0	0	0	0	0	0	0	



water consumption



ENVIRONMENTAL IMPACTS - EN 15804+A1, CML / ISO 21930

	Results per functional or declared unit											
Indicator	Unit	A1	A2	А3	Tot.A1- A3	A4	A 5	C1	C2	С3	C4	D
GWP	kg CO₂ eq.	1.43E0	1.01E-2	1.33E-1	1.58E0	5.38E-2	7.35E-2	0	2.39E-3	0	4.49E-2	0
ODP	kg CFC ₋₁₁ eq.	1.31E-7	1.91E-9	1.39E-8	1.47E-7	1.01E-8	1.17E- 10	0	4.5E-10	0	1.38E-9	0
AP	kg SO₂ eq.	2.57E-2	2.08E-5	4.17E-4	2.61E-2	1.11E-4	8.19E-6	0	4.9E-6	0	2.11E-5	0
EP	kg PO₄³ eq.	1.94E-3	4.19E-6	1.67E-4	2.11E-3	2.23E-5	6.28E-6	0	9.9E-7	0	2.12E-3	0
POCP	kg C₂H₄e	8.64E-4	1.32E-6	2.36E-5	8.89E-4	7E-6	1.93E-7	0	3.11E-7	0	9.41E-6	0
ADP- minerals & metals	kg Sb eq.	1.94E-5	1.74E-7	1.09E-6	2.07E-5	9.27E-7	1.83E-8	0	4.11E-8	0	6.02E-8	0
ADP-fossil	МЈ	2.53E1	1.59E-1	4.19E0	2.96E1	8.45E-1	1.36E-2	0	3.75E-2	0	1.32E-1	0
Acronyms	GWP = Globa Eutrophication resources; A	on potential	; POCP = Fo	rmation of o	zone of low	er atmosph	ere; ADP-mi	nerals&met	als = Abiotic	depletion	potential for	

ENVIRONMENTAL IMPACTS – GWP-GHG - THE INTERNATIONAL EPD SYSTEM

Results per functional or declared unit												
Indicator	Unit	A1	A2	А3	Tot.A1- A3	A4	A5	C1	C2	С3	C4	D
GWP-GHG	kg CO2e	1.48E+0	1.01E-2	1.39E-1	1.63E+0	5.43E-2	7.35E-2	0	2.41E-3	0	6.33E-2	0





General information

Programme information

Programme:	The International EPD® System
	EPD International AB
Address	Box 210 60
Address:	SE-100 31 Stockholm
	Sweden
Website:	www.environdec.com
E-mail:	info@environdec.com

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)						
Product category rules (PCR): PCR – Construction products 2019:14, version 1.1						
PCR review was conducted by: The International EPD® System						
Independent third-party verification of the declaration and data, according to ISO 14025:2006:						
☐ EPD process certification ☐ EPD verification						
Third party verifier: Vladimir Kočí, LCA Studio						
Approved by: The International EPD® System						
Procedure for follow-up of data during EPD validity involves third party verifier:						
□ Yes ⊠ No						

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.

Revision (v1.1) details:

New product of Protega Upgrade was added to the calculations in group together with Protega Novatherm 2FR, Protega Wood S. The results of Protega Upgrade do not differ by more than 10 % between any of the included products, so calculations are prepared for average manufacturing. Also, products containing dangerous REACH SVHC substances in amounts greater than 0,1 % (1000 ppm) were updated.

Revision (v1.2) details:

New product of Protega Timber W was added to the calculations in group together with Protega Novatherm 2FR, Protega Wood S and Protega Upgrade. The results of Protega Timber W do not differ by more than 10 % between any of the included products, so calculations are prepared for average manufacturing.





References

General Programme Instructions of the International EPD® System. Version 3.01;

PCR 2019:14 Construction products (version 1.1);

EN 15804:2012+A2:2019 Sustainability of construction works. Environmental product declarations.

Core rules for the product category of construction products;

ISO 14044:2006/Amd 2:2020 Environmental management. Life Cycle Assessment. Requirements and guidelines.

ISO 14025:2010 Environmental labels and declarations. Type III environmental declarations. Principles and procedures.

Tools and database

One Click LCA tool;

Ecoinvent 3.6 database

Contact information

